



Hyperion P73 Series

- * Anti glare light distribution is designed to protect eyes from glare.
- * Zero spill light control technology to create a harmonious night environment.(ULR0)
- * Asymmetrical optical design for fixed point projection increases site uniformity.
- * Low EPA design increases the stability of the structure to adapt to hostile environments.
- * The best choice for light pollution problem.



P73-1060W/1260W



P73-420W



P73-630W



P73-840W



P73-1600W





IP66 Rating



Anti glare




Adjustable Angle

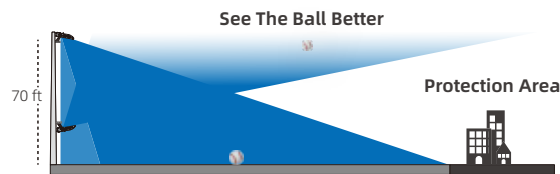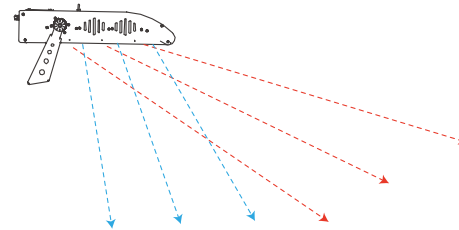



P73 Sports Lighting

Our precisely engineered optics of polarized light aim light directly onto the field of play, to shine uniformly and to minimize glare. Outdoor venues benefit from spill light control, no more skyglow and no more complaints from the neighbors.

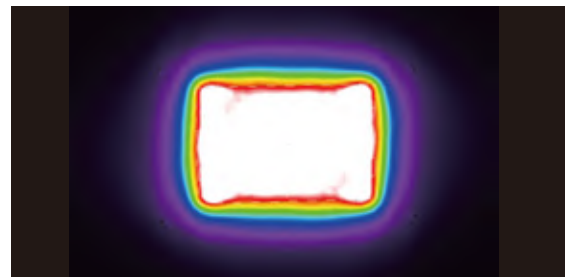


Our P73 lighting system providing the perfect combination of optical accuracy and cutoff. When aimed on the field, this results in excellent light levels and uniformity throughout the life of the system, as well as a significant control in spill light.

Optics

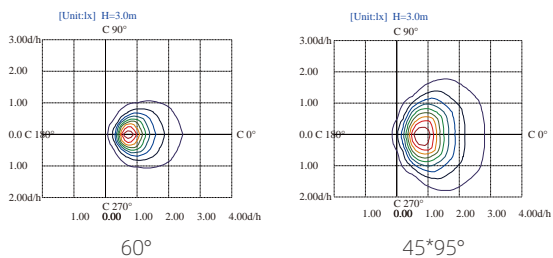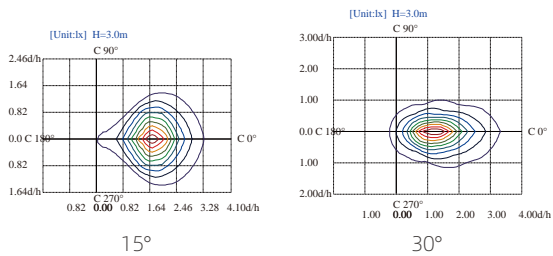


Specification


ITEM	LED	Power Supply	Input Voltage
P73-420W /630W /840W /1060W /1260W /1600W	Lumileds/OSRAM	Meanwell, Inventronics, Custom	100-277V AC /200-480V AC 50/60Hz
System Wattage	Beam Angle	CCT	CRI
420W /630W /840W /1060W /1260W/1600W	15°/30°/60°/45*95°	3000K/4000K/5000K /5700K/6500K	70/80/90+
Lifespan	Surge protection device standard	Operating Temperature	IP/IK Rating
100000H	10KV /20KV	-40°C-+50°C	IP66/IK10
Dimming	EPA	Color	LUMEN
0-10V/DALI/DMX	<p>P73 420W 0.0567 m²</p> <p>P73 630W 0.0632 m²</p> <p>P73 840W 0.0976 m²</p> <p>P73 1060W 0.1087 m²</p> <p>P73 1260W 0.1087 m²</p> <p>P73 1600W 0.1273 m²</p>	Gray (standard) Black (Chosen)	<p>P73 420W 64260 LM</p> <p>P73 630W 96390 LM</p> <p>P73 840W 128520 LM</p> <p>P73 1060W 162180 LM</p> <p>P73 1260W 192780 LM</p> <p>P73 1600W 240000 LM</p>

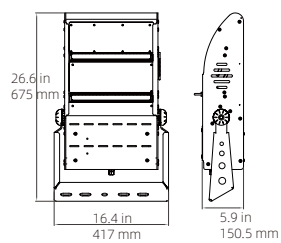


420W Weight: 13.9 KG
Remove driver: 11.3 KG




630W Weight: 16.8 KG
Remove driver: 13.3 KG

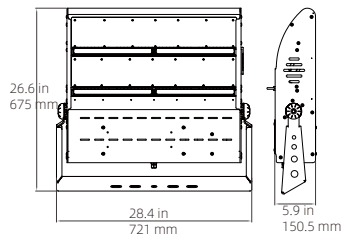

840W Weight: 23.5 KG
Remove driver: 18.2 KG

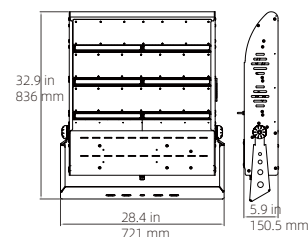


1060W /1260W Weight: 28.5 KG
Remove driver: 21.5 KG

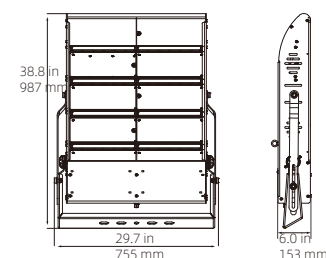

1600W Weight: 33.6 KG
Remove driver: 26.6 KG

Bracket

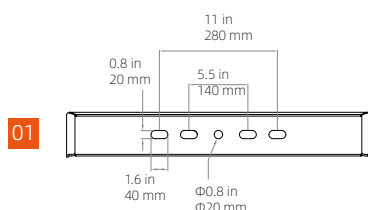

01

02

